

TRANSFORMING MOLD MANUFACTURING: A REVIEW OF ADDITIVE MANUFACTURING IN METALLIC AND COMPOSITE TOOLING

Onyia, T. M

Department of Metallurgical and Materials Engineering, Enugu State University of Science and Technology.

Corresponding Author Contacts; +2348147764797, Tobias.Onyia@Esut.Edu.Ng

Abstract

Additive Manufacturing (AM) is reshaping traditional mold production by enabling the fabrication of complex, customized structures with improved material efficiency and reduced lead times. This paper investigates the application of am in the production of metallic and composite molds, focusing on key techniques such as powder bed fusion (PBF), Directed Energy Deposition (DED), Binder Jetting, And Vat Photo polymerization. The study evaluates material suitability, design flexibility, sustainability, and process efficiency, while also addressing existing challenges such as high production costs, material limitations, and post-processing demands. Furthermore, it highlights recent advancements in multi-material printing, process automation, and hybrid manufacturing approaches. by synthesizing recent research and technological trends, this work offers insights into the evolving role of am in mold manufacturing and its potential to replace or complement conventional mold fabrication methods across diverse industries.

Keywords: 3D Printing, Additive Manufacturing, Composite Molds, Metallic Molds, Structural Integrity.

Introduction

Additive Manufacturing (AM), a three dimensional solid rapid free forming technology that makes physical objects by stacking material layer-by-layer [1]. It is well known as 3D Printing, Rapid Prototyping [2], Solid Freeform Fabrication [3], Rapid Manufacturing [4], Desktop Manufacturing [5], Direct Digital Manufacturing [6], Layered Manufacturing [7], Generative Manufacturing [8][9]. Additive Manufacturing has undergone a significant evolution since its inception in the 1980s, Transitioning from a rapid prototyping tool to a viable manufacturing method for a broad spectrum of applications. The technology's advancement is marked by innovations in materials, technology, and software, propelling am into industries such as aerospace, automotive, healthcare, manufacturing, and fashion [10] [11] [12]. In recent years, 3d printing has gained acclaim for its exceptional ability to enable customization, minimize waste, and produce intricate geometries unattainable through traditional manufacturing methods. driven by its layer-by-layer fabrication approach, [13] This technology continues to evolve rapidly, offering the unique advantage of creating virtually any shape while accelerating product development timelines and providing an effective solution for constructing complex and unconventional structures beyond the reach of conventional techniques.



[CC BY 4.0 Deed Attribution 4.0 International](https://creativecommons.org/licenses/by/4.0/)

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

This progression has elevated additive manufacturing into a refined suite of processes capable of utilizing a wide variety of materials, including polymers [14], metals [15], ceramics [16], and composites [17], fueling innovation across multiple industries. As Am Advances, It is poised to revolutionize production methods, reshape supply chains, and redefine product design globally, cementing its role as a transformative manufacturing technology and paving the way for a future of on-demand, customized production across sectors.

While Additive Manufacturing (AM) may seem like a standalone process, it actually involves several interconnected stages of production that rely on advanced tools and technologies. one critical step is the use of computer-assisted automated equipment, such as 3d scanners, which play a key role in capturing precise details of an object for model construction or reconstruction [18]. These initial stages are crucial for ensuring the precision and quality of the 3d model, which serves as the foundation for the additive manufacturing process [3]. Typically, this involves creating a virtual model using cad software, with the final output influenced by factors such as materials, manufacturing techniques, machining methods, and design considerations. beyond the technological advancements in additive manufacturing, there is an extensive engineering process that precedes it, involving detailed planning and design. despite the complexity of this design phase, additive manufacturing offers significant advantages in various technical scenarios and applications in comparison to the multi-step conventional manufacturing methods [1] as synthesized.

Table 1: Comparison Between Additive Manufacturing and Traditional Manufacturing

	Additive Manufacturing	Traditional Manufacturing
Time Factor	<ul style="list-style-type: none"> • Ideal for quickly launching products, especially for small-scale production and prototyping. • Production may take longer for specific techniques, detailed features, or complex parameters. 	<ul style="list-style-type: none"> • More efficient for large-scale manufacturing but less suited for rapid prototyping. • Extended lead times are often required for tooling preparation.
Customization/Design Factor	<ul style="list-style-type: none"> • Allows quick modifications to designs as needed. • May face constraints in size and occasionally in accuracy. • Offers exceptional flexibility and product customization. • Well-Suited for low-volume production or one-off applications. 	<ul style="list-style-type: none"> • Capable of producing components with large sizes and dimensions. • Delivers high precision in geometric features. • Customization options are restricted by tooling and machine limitations. • Once production begins, large-scale manufacturing proceeds without further customization.
Mechanical Properties/Post Manufacturing Process	<ul style="list-style-type: none"> • Requires post-processing for high strength • Global geometry remains untouched, requiring no additional post-processing. 	<ul style="list-style-type: none"> • Surfaces are smooth and typically do not need post-processing. • Final processing of the part is usually necessary for completion.



[CC BY 4.0 Deed Attribution 4.0 International](https://creativecommons.org/licenses/by/4.0/)

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

	<ul style="list-style-type: none"> Post-processing is necessary to refine rough edges and smoothen uneven surfaces. 	
Cost Effectiveness	<ul style="list-style-type: none"> Cost-efficient for small-volume production. Requires costly equipment for large-scale manufacturing. 	<ul style="list-style-type: none"> Economical for medium to large-volume production. High initial investment costs are offset over time with large-scale production.
Sustainable Resource Management	<ul style="list-style-type: none"> Produces no waste during successful runs. Offers a limited range of material options. Primarily utilizes recyclable materials. 	<ul style="list-style-type: none"> Material is wasted due to subtractive manufacturing methods. Longer operation times result in less overall waste generation.
Product Properties	<ul style="list-style-type: none"> The mechanical properties are significantly affected by the printing parameters. 	<ul style="list-style-type: none"> The parts and tooling exhibit excellent mechanical properties.

Despite the differences between Additive Manufacturing (AM) and traditional manufacturing, the advancements in AM over time have been substantial. One notable area of impact is in mold production, where am has revolutionized the design and fabrication of molds, enabling greater precision, customization, and efficiency. as the technology continues to evolve, it is poised to make an even greater impact on manufacturing and industries such as aerospace, automotive, biomedical, energy, construction, and general engineering. Over the past three decades, there has been remarkable and rapid growth in research on am, particularly in its application to mold- making and other specialized fields across manufacturing. this surge in application underscores the growing recognition of AM's potential to transform manufacturing, with significant benefits in mold production and beyond, capturing interest from industry and academics where needed.

Table 2: Classifications And Sub-Classifications Of Additive Manufacturing (Am) Technologies.

Categories Of Additive Manufacturing	Sub-Categories Of Additive Manufacturing
<ul style="list-style-type: none"> Direct Energy Deposition 	<ol style="list-style-type: none"> Laser Cladding (LM) / Laser Engineered Net Shaping (LENS) Electron Beam Free-Form Fabrication (EBF³) Wire-Laser Additive Manufacturing (WLAM) Wire-Arc Additive Manufacturing (WAAM)
<ul style="list-style-type: none"> Binder Jetting 	<ol style="list-style-type: none"> Binder Jetting (BJT)
<ul style="list-style-type: none"> Powder Bed Fusion 	<ol style="list-style-type: none"> Selective Laser Sintering (SLS) Direct Metal Laser Sintering (DMLS) Selective Laser Melting (SLM) Electron Beam Melting (EBM)
<ul style="list-style-type: none"> Sheet Lamination 	<ol style="list-style-type: none"> Laminated Object Manufacturing (LOM) Friction Stir Additive Manufacturing (FSAM) Ultrasonic Consolidation (UC) Selective Deposition Lamination (SDL)
<ul style="list-style-type: none"> Material Jetting 	<ol style="list-style-type: none"> Material Jetting (MJT) Nano-Particle Jetting (NPJ) Drop On Demand (DOD)
<ul style="list-style-type: none"> Vat Polymerization 	<ol style="list-style-type: none"> Continuous Direct Light Processing (CDLP)



[CC BY 4.0 Deed Attribution 4.0 International](https://creativecommons.org/licenses/by/4.0/)

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

	<ul style="list-style-type: none"> b. Digital Light Processing (DLP) c. Direct Uv Printing (DUP) d. Stereo Lithography (SLA)
<ul style="list-style-type: none"> • Material Extrusion 	<ul style="list-style-type: none"> a. Fused Deposition Modelling (FDM) b. Fused Filament Fabrication (FFF)

Sheet Lamination

Sheet Lamination, also known as laminated object manufacturing (LOM), is an Additive Manufacturing technique that constructs objects by stacking and bonding thin sheets of material. the process starts with feeding adhesive-coated sheets typically composed of paper, plastic, or metal into the system. A laser or cutting tool precisely outlines the shape of each layer based on a digital model. The layers are then fused using heat or pressure, and this cycle repeats until the final object is fully formed. Once printing is complete, excess material is removed to reveal the finished part. Sheet Lamination is particularly valued for its cost-effectiveness and ability to produce large-scale components with minimal complexity compared to other additive manufacturing methods. It is widely applied in prototyping, architectural modelling, and tooling applications. [19]

Advantages: Fast and inexpensive for prototyping large molds.

Challenges: Weak mechanical properties, requires post-processing.

Direct Energy Deposition

Directed Energy Deposition (DED) is an Additive Manufacturing process that melts and deposits material onto a surface using a high-energy source, such as a laser, electron beam, or plasma arc. The process begins with a computer-aided design (CAD) model, which dictates the movement of both the energy source and the material deposition. As the energy source creates a molten pool on the substrate, a nozzle precisely delivers feedstock material, typically in wire or powder form, into the molten region. This controlled layering process allows for the fabrication of complex structures while ensuring efficient material use. DED is commonly utilized for repairing damaged components, enhancing existing parts, and fabricating near-net-shape structures. Key advantages of DED include high deposition rates, material versatility, and the ability to create large-scale parts while minimizing waste. [20].

Advantages: High deposition rates, ideal for mold repair, reduced waste.

Challenges: Rough surface finish, limited geometric complexity.

Vat Photo polymerization

Vat Photo polymerization, commonly referred to as stereolithography (SLA) Or Digital Light Processing (DLP), is an Additive Manufacturing method that uses light to selectively cure liquid photopolymer resin, building objects layer by layer. The process starts with a digital 3D model, which is sliced into cross-sectional layers. each layer is then projected onto a vat of liquid resin, where exposure to UV light from a laser or projector causes



[CC BY 4.0 Deed Attribution 4.0 International](https://creativecommons.org/licenses/by/4.0/)

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

The illuminated regions to harden. after a layer solidifies, the build platform moves slightly, allowing the process to continue until the entire object is completed. This method is highly regarded for its ability to produce intricate, high-resolution components with smooth surface finishes. It is widely used in product prototyping, dental and medical device manufacturing, and precision engineering applications. [21].

Advantages: Exceptional accuracy and surface finish, ideal for prototyping.

Challenges: Limited material strength, unsuitable for high-heat molds.

Material Jetting

Material Jetting is a high-precision additive manufacturing technique that builds 3D objects by depositing tiny droplets of material layer by layer. This process employs inkjet print heads to dispense photopolymers or wax-based materials, which are immediately cured using ultraviolet (UV) light or other solidification methods. The printing process begins with a 3D digital model, which is sliced into layers to determine the deposition path. As the print head moves across the build platform, it precisely jets droplets onto designated areas, forming the object's structure. Each layer is rapidly cured before the next one is applied, ensuring dimensional accuracy and mechanical stability. Material Jetting is particularly advantageous for producing multi-material components, full- color prototypes, and highly detailed models in industries such as aerospace, healthcare, and product design [22].

Advantages: Excellent surface finish, ideal for intricate mold designs.

Challenges: High material costs, not suitable for high-strength molds.

Material Extrusion

Material Extrusion is an additive manufacturing technique that constructs three- dimensional objects by depositing molten thermoplastic material through a heated nozzle. the process begins with a 3d digital model, which is sliced into layers to guide the deposition path. a thermoplastic filament is fed into the extruder, heated beyond its melting point, and systematically forced through the nozzle. As the nozzle moves along the predetermined path, it deposits the material layer by layer onto a build platform, where it solidifies upon cooling. this cycle continues until the entire structure is completed. Material Extrusion is a widely accessible and cost-effective technique, commonly used for rapid prototyping, small-scale manufacturing, and research applications. its ability to process various thermoplastic materials makes it a preferred choice in industries such as aerospace, automotive, and consumer product development [23].

Advantages: Low-cost, easy access, good for rapid prototyping.

Challenges: Limited accuracy, weak thermal properties without reinforcement.

Powder Bed-Fusion

Powder Bed Fusion (PBF) is a highly precise Additive Manufacturing process that constructs objects by selectively melting or sintering layers of powdered material. the process begins



[CC BY 4.0 Deed Attribution 4.0 International](https://creativecommons.org/licenses/by/4.0/)

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

with a thin layer of powder, such as metal, plastic, or ceramic, evenly spread across a build platform. a high-energy source, such as a laser or electron beam, then selectively fuses specific areas of the powdered layer based on a digital model. Once a layer is fused, the build platform lowers slightly, and a new layer of powder is distributed over the surface. this layer-by-layer fusion process continues until the object is fully formed. one of the key benefits of PBF is its ability to produce highly complex geometries with exceptional precision and structural integrity. Additionally, the surrounding unfused powder acts as a natural support, enabling the creation of intricate designs without the need for additional support structures. Once the printing process is complete, excess powder is removed, and the printed part may undergo post-processing treatments such as heat treatment, machining, or surface finishing to achieve the desired mechanical properties and surface quality. PBF is widely used in medical implants, aerospace components, and high-performance industrial applications [24].

Advantages: High precision, excellent mechanical properties, ideal for metal molds.

Challenges: High cost, time-consuming post-processing, residual stresses.

Binder Jetting

Binder Jetting is an additive manufacturing technique that creates 3D objects by depositing a liquid binding agent onto layers of powdered material. The process begins with a thin layer of powder uniformly spread across the build platform. A print head then moves across the surface, selectively dispensing the binding agent onto specific areas of the powder bed to bond the particles together, forming the object's cross- section. After a layer is completed, a new layer of powder is applied, and the process is repeated until the entire object is constructed. Once the print is complete, excess powder is removed, and the printed part may undergo post-processing steps, such as curing, sintering, or infiltration, to enhance its mechanical properties and surface finish. Binder Jetting is widely recognized for its speed, cost-efficiency, and ability to produce complex geometries with minimal material waste. It is commonly used in industries such as automotive, aerospace, and healthcare, with applications ranging from functional metal parts to ceramic-based components. Its versatility in material compatibility, including metals, ceramics, and composites, further enhances its appeal for diverse engineering applications [25].

Advantages: Cost-effective, fast production, minimal thermal distortion.

Challenges: Weak mechanical properties without post-processing.

Materials For Additive Manufacturing: Metals, Composites, And Polymers		
Metals	Composites	Polymers
<ul style="list-style-type: none"> Titanium: (Ti-6Al-4V, Ti-6Al-4V ELI, Ti- 6Al-2Sn-4Zr-6Mo, Ti-5Al-2.5Sn)[26] Stainless Steel: (316L, 17-4 Ph, 15-5 Ph, 304L, 420)[27] Carbon Steel: (1018, 1045, 4140, 4340)[28] 	<ul style="list-style-type: none"> Carbon Fiber Reinforced Polymers (Markforged Onyx, Nylonx, Carbonx, etc.) [50] Glass Fiber Reinforced Polymers[51] 	<ul style="list-style-type: none"> Acrylonitrile Butadiene Styrene (Abs) [62] [63] Polylactic Acid (Pla)[64]



CC BY 4.0 Deed Attribution 4.0 International

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

<ul style="list-style-type: none"> Aluminium: (AlSi10mg, AlSi12, AlSi7mg, Al6061, Al7075) [29] Cobalt-Chrome: (CoCrMo, CoCr, CoCrFeNiMn) [30] Nickel Alloys: (Inconel, Hastelloy X, Haynes 282, Waspaloy) [31] Copper: (CuNi10Fe1Mn, CuCrZr, CuAl10Ni5Fe4) [32] Gold: (AuAg, Au-Cu)[33][34] Silver: (AgCu, AgPd)[35][36][37] Platinum: (Pt 950, Pt 900, Pt 850) [38] Zinc: (ZnAl4) [39] Magnesium: (Az31b, Az61a, Az80a) [40] Inconel: (Inconel 718, Inconel 625, Inconel 706) [41][42][43] Tool Steel: (H13, D2, A2, S7) [44] Bronze: (CuSn6, CuSn8, CuSn10) [45] Brass: (CuZn37, CuZn40, CuZn15) [46] Tungsten [47] Molybdenum [48] Zirconium[49] 	<p>(Ultimaker Tough Pla, Matterhackers Nylong, Etc.)</p> <ul style="list-style-type: none"> Metal Matrix Composites (Aluminum Reinforced With Silicon Carbide, Nickel Reinforced With Aluminum Oxide) [52][53] Ceramic Matrix Composites (Silicon Carbide Reinforced With Carbon Fiber) [54][55] Hybrid Composites (Windform Xt 2.0, Roboze Carbon Peek, etc.) [56] Bio-Composites (3D4makers Flexfill, Polymaker Polywood, etc.) [58] Conductive Composites (Ultrafuse 316lx, etc.) [59] Nanocomposites (Graphene PLA, Piezoelectric Nanoparticle Polymer Composite)[60][61] 	<ul style="list-style-type: none"> Polyethylene Terephthalate Glycol (Petg)[65] Polyamide (Nylon)[65] Polyether Ether Ketone (Peek)[66][67] Polycarbonate (Pc)[68] Thermoplastic Polyurethane (Tpu)[69] Polypropylene (Pp)[70] High-Density Polyethylene (Hdpe)[71] Low-Density Polyethylene (Ldpe)[72] Polyphenylsulfone (Ppsf)[73] Polyetherimide (Pei)[74] Polyetherketoneketone (Pekk)[75] Polyvinyl Alcohol (Pva)[76] Polyvinyl Butyral (Pvb)[77] Polyethyleneimine (Pei)[78] Polyacrylamide (Paa)[79] Polymethyl Methacrylate (Pmma)[80]
---	---	--

Molds are indispensable tools in the manufacturing industry, playing a pivotal role in mass production processes such as injection molding, metal forming, melt compounding, vacuum bagging, liquid injection molding, casting, thermoforming, and composite fabrication, as well as specialized applications like customized biomedical devices [81]. However, in today's highly competitive market, the mold and die industry faces significant challenges, including rising manufacturing costs, slower price adjustments, increasing automation that reduces the need for human labor, and a shortage of skilled personnel to operate advanced digital tooling systems. below are some of the most important molding processes [82]:

Injection Molding: Injection Molding is one of the most prevalent techniques for producing plastic or metal parts, particularly those requiring complex three-dimensional shapes. this process involves injecting a liquid material under high pressure into a closed, cooled mold. the material fills the mold cavity, taking its shape, and solidifies as it cools.



CC BY 4.0 Deed Attribution 4.0 International

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

Once cooled, the solidified part is extracted. known for its efficiency, injection molding is ideal for large-scale production, offering high precision and repeatability [83] [84] [85].

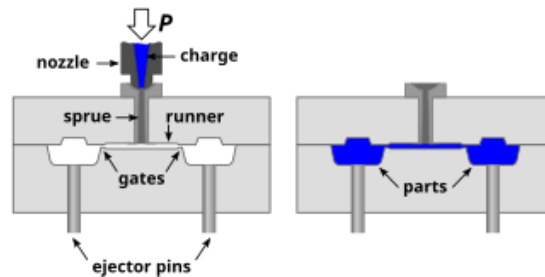


Fig 1: Simplified Diagram Of The Process (Photo Source – [Wikipedia](#))

Casting: Casting is a simpler molding method characterized by its low tooling costs and straightforward setup. this technique involves heating thermoplastic material until it melts, then pouring the molten material into a mold. After cooling, the solidified part is removed from the mold. Casting is versatile and cost-effective, making it suitable for applications that do not require high-pressure systems [86] [87].

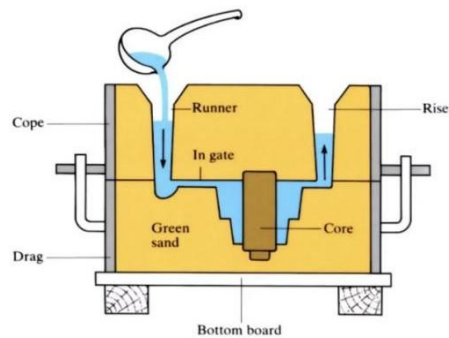


Fig 2: Casting Process (Photo Source – [Zintilon](#))

Extrusion Molding: Extrusion Molding is similar to injection molding but with a focus on creating continuous, linear shapes. in this process, molten material is forced through a die, forming a rod-like structure. once the material cools, it can be cut into pieces of varying lengths, depending on specific requirements. this method is particularly effective for manufacturing pipes, rods, and similar structures [88] [89] [90].

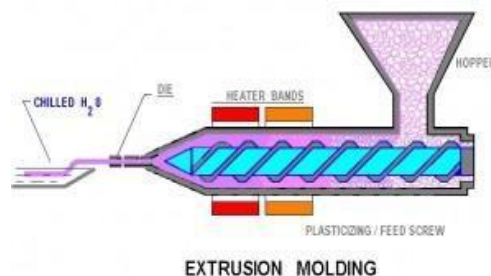


Fig 3: Extrusion Molding (Photo Source – [Engineers gallery](#))

Rotational Molding: Rotational Molding is an eco-friendly process, minimizing material waste while delivering consistent results. this technique uses a mold mounted on mechanical arms that rotate at high speeds. The Centrifugal Force ensures the liquid material evenly coats the interior surface of the mold, resulting in a hollow part with uniform wall thickness. this method is widely used for creating large, hollow objects like storage tanks and playground equipment [91] [92] [93].

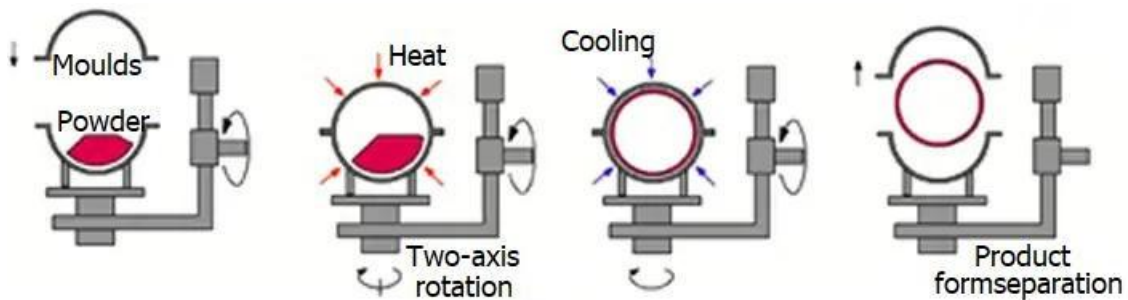


Fig 4: Rotational Molding (Photo Source – [Polyroto](#))

Blow Molding: Blow Molding is a specialized process commonly used for manufacturing hollow items such as milk bottles and pipes. It combines injection and air-blowing techniques. in this process, molten plastic is injected into a mold, and air is blown into the material via a tube. this forces the plastic to conform to the shape of the mold. After cooling, the part is extracted. the method is highly efficient, producing up to 2,000 products per day while ensuring uniform wall thickness [94] [95] [96] [97] [98] [99].

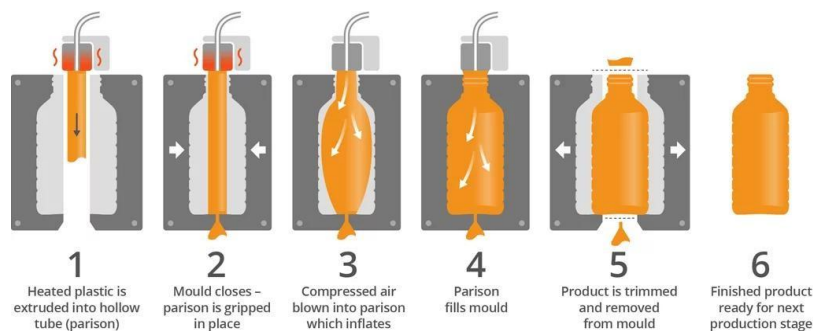


Fig 5: Blow Molding (Photo Source – [Robinson packaging](#))

Compression Molding: Compression Molding is a labor-intensive method primarily used for large-scale production rather than mass manufacturing. the process begins by pouring molten material into a lower mold, which is then compressed by an upper mold to form the desired shape. The part is left to cool and solidify before removal. the strength and quality of the finished product are heavily influenced by the temperature applied during the process [100] [101] [102].



[CC BY 4.0 Deed Attribution 4.0 International](#)

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

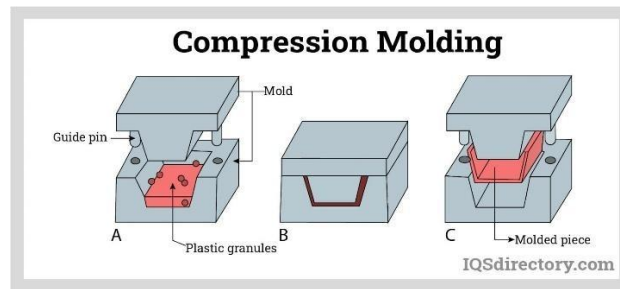


Fig 6: Compression Molding (Photo Source – [Iqsdirectory](https://www.iqsdirectory.com))

Design Of A Basic Mold Structure (Left)	Transparent View Of The Mold Showcasing Internal Design (Center)	Final Product Created From The Mold (Right)

Full Mold	One Half Of The Mold

Each molding technique offers unique advantages tailored to specific applications. While injection and blow molding excel in large-scale production, methods like rotational and compression molding address niche requirements. The continuous evolution of these processes highlights their importance in modern manufacturing, driving efficiency, sustainability, and innovation across industries. [103] At the forefront of this evolution, mold manufacturing is set to achieve remarkable advancements through the integration of Additive Manufacturing (AM). This transformation is fuelled by the diverse classifications of am processes, strategic material utilization, and the fundamental principles underpinning its operations. key enablers include the adoption of advanced techniques, the optimization of printing parameters, and a balanced understanding of AM's strengths and limitations. Together, these elements will enhance precision, efficiency, and adaptability in mold production, positioning Additive Manufacturing as a revolutionary force in the industry.



[CC BY 4.0 Deed Attribution 4.0 International](https://creativecommons.org/licenses/by/4.0/)

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

Sustainability And Environmental Impact

The integration of Additive Manufacturing (AM) in mold production presents a promising shift toward more sustainable manufacturing processes. Traditional mold-making techniques, such as machining, casting, and injection molding, often generate significant material waste due to subtractive manufacturing principles. In contrast, AM follows an additive approach, using only the necessary amount of material, thereby reducing waste generation and improving resource efficiency.

One of the key sustainability advantages of AM is its ability to optimize material utilization. Processes such as powder bed fusion (PBF) and direct energy deposition (DED) allow for the reuse of excess powder, minimizing material loss. Similarly, binder jetting and Vat photo polymerization reduce scrap material compared to conventional machining methods. Moreover, the elimination of intermediate tooling and complex assembly steps leads to lower energy consumption and carbon footprint, making AM an eco-friendlier alternative.

In terms of material sustainability, recent advancements in bio-based and recyclable polymers for AM have further enhanced its environmental credentials. Materials such as biodegradable polylactic acid (PLA) and bio-composites infused with natural fibers have emerged as viable options for mold fabrication. Additionally, research into metal recycling and closed-loop AM systems is gaining traction, enabling manufacturers to reclaim and repurpose metal powders and reduce dependency on virgin raw materials. Another significant environmental benefit of AM lies in its role in localized and on-demand manufacturing. By producing molds closer to their point of use, AM helps reduce logistics-related emissions associated with global supply chains. This capability is particularly beneficial for industries requiring rapid mold modifications, such as automotive and aerospace, where supply chain delays can be costly and environmentally impactful.

However, despite these advantages, some sustainability concerns persist. Certain AM processes, particularly those involving laser sintering or metal powder fusion, require high energy inputs, which may offset material savings. Additionally, the limited recyclability of some photopolymer resins and composite materials remains a challenge. To fully realize AM's sustainability potential, future research should focus on energy-efficient printing techniques, improved recyclability of AM materials, and eco-friendly alternatives to traditional feedstock. Overall, while AM significantly reduces material waste and offers numerous environmental advantages, continued advancements in energy efficiency, waste reduction strategies, and sustainable materials are essential for maximizing its eco-friendly potential in mold production.



[CC BY 4.0 Deed Attribution 4.0 International](https://creativecommons.org/licenses/by/4.0/)

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

Challenges And Future Directions

Despite the significant advancements in additive manufacturing (AM) for mold production, several challenges still hinder its full-scale adoption across industries. These challenges range from material limitations and cost concerns to post-processing requirements and certification hurdles. Addressing these issues is crucial for AM to become a dominant manufacturing technique in large-scale industrial applications. However, ongoing research and technological advancements are paving the way for a more efficient and sustainable future in AM-based mold production.

Challenges Facing Additive Manufacturing In Mold Production

Material Limitations And Mechanical Properties

While Additive Manufacturing (AM) enables the use of various materials, including metals, polymers, and composites, many of these materials still face challenges in mechanical performance, thermal resistance, and durability when compared to traditionally manufactured mold materials. Metals such as aluminum, titanium, and tool steel used in AM often require post-processing, such as heat treatment and machining, to achieve the same strength and wear resistance as conventionally produced molds. Similarly, composite and polymer-based AM molds may lack the thermal conductivity and long-term durability required for high-pressure injection molding or die-casting applications. Additionally, issues related to powder quality, porosity, and material recycling remain major concerns, particularly for metal AM techniques like selective laser melting (SLM) and electron beam melting (EBM). [104], [105]

High Equipment and Production Costs

Although Additive Manufacturing (AM) reduces material waste and eliminates tooling costs, the initial investment in AM machinery and materials remains high. Industrial-grade metal 3D printers can cost hundreds of thousands of dollars, making them inaccessible to smaller manufacturers. Additionally, the cost of materials, particularly metal powders, is significantly higher than the bulk raw materials used in conventional mold-making. Furthermore, energy consumption in laser-based AM processes is greater than in traditional manufacturing techniques, raising concerns about long-term cost efficiency. [106], [107]

Post-Processing and Surface Finishing Challenges

Unlike traditional mold-making, which often results in smooth and finished surfaces, Additive Manufacturing (AM)-produced molds typically require extensive post-processing to meet precision, surface roughness, and dimensional tolerance requirements. Grinding, polishing, and CNC machining are often necessary after printing to ensure proper mold function. Additionally, residual stresses and internal defects can arise from AM processes, potentially affecting the structural integrity of the mold. Moreover, the removal of support material in certain AM techniques, such as powder bed fusion, can be labor-intensive and time-consuming, adding to the overall production effort. [108], [109]



[CC BY 4.0 Deed Attribution 4.0 International](https://creativecommons.org/licenses/by/4.0/)

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

Scalability and Production Speed Limitations

Additive Manufacturing (AM) is well-suited for prototyping and low-volume production, but it still struggles to match the speed and efficiency of traditional high-volume manufacturing methods. Build rates in am are relatively slow, particularly for large molds, as the layer-by-layer fabrication process takes time. Additionally, batch production is limited, making mass production of identical molds more efficient with conventional techniques such as injection molding or CNC machining. [110], [111]

Intellectual Property and Certification Issues

As Additive Manufacturing (AM) technology advances, challenges related to intellectual property (IP) protection and industry certification are becoming more prominent. the ability to share digital design files facilitates innovation but also increases the risk of unauthorized replication and IP theft of mold designs. Additionally, standardization and quality assurance frameworks for am are still evolving, making it difficult for am- produced molds to meet stringent regulatory requirements in industries such as aerospace, medical, and automotive. [112], [113]

Future Directions and Emerging Solutions

Despite these challenges, ongoing research and technological advancements are paving the way for the broader adoption of am in mold production. Several key areas are expected to drive improvements in the coming years:

Development of Advanced Materials

To overcome material limitations, researchers should focus on developing high- performance metal alloys with superior heat resistance and wear properties. Additionally, hybrid materials and functionally graded materials (FGMS) that combine the advantages of different metals or composites can enhance the performance of am-produced molds. furthermore, advancements in polymer and ceramic composites are essential for creating molds with improved mechanical strength and thermal stability, ensuring broader applicability in high-performance manufacturing environments. [114], [115]

Cost Reduction and Process Optimization

More Efficient Additive Manufacturing (AM) systems with faster build speeds and lower energy consumption are being developed to enhance productivity and cost-effectiveness. additionally, hybrid manufacturing approaches that integrate am with CNC machining or injection molding are emerging as a way to balance cost, precision, and scalability. Furthermore, advancements in material recycling and powder reuse strategies are expected to reduce raw material costs in metal AM, making the technology more sustainable and economically viable. [116], [117]



[CC BY 4.0 Deed Attribution 4.0 International](https://creativecommons.org/licenses/by/4.0/)

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

Automation and AI Integration in AM

Artificial Intelligence (AI) and Machine Learning (ML) are being utilized to optimize printing parameters, detect defects, and enable real-time process monitoring, improving the efficiency and reliability of additive manufacturing (AM). Additionally, automated post-processing systems are being developed to minimize labor-intensive finishing steps, streamlining production workflows. Furthermore, generative design software is enhancing mold efficiency and customization by optimizing material usage while maintaining structural integrity, leading to more sustainable and high-performance manufacturing solutions. [118], [119]

Scalability Improvements for Mass Production

Parallel 3D Printing, where multiple printers operate simultaneously, will significantly enhance production rates, making additive manufacturing (AM) more viable for large-scale applications. Additionally, the development of large-format am machines will enable the printing of bigger molds in a single build, reducing the need for complex assembly processes. Furthermore, advancements in multi-material printing will allow mold components to be fabricated in a single step, eliminating additional assembly requirements and improving overall efficiency in mold manufacturing. [120], [121]

Establishment of Industry Standards and Regulations

Standardization Efforts by Organizations Such as ISO, ASTM, And SAE will enhance quality control and streamline certification processes, ensuring greater reliability in Additive Manufacturing (AM). Additionally, block chain technology may be implemented to secure digital designs and protect intellectual property rights, reducing the risk of unauthorized replication. Furthermore, more stringent testing and validation protocols will help am-produced molds meet industry-specific performance standards, increasing their adoption in sectors with strict regulatory requirements. [122], [123]

Conclusion

Additive Manufacturing has emerged as a transformative approach in the production of metallic and composite molds, offering substantial advantages over traditional manufacturing methods in terms of design flexibility, lead time reduction, material efficiency, and customization. as reviewed in this paper, techniques such as powder bed fusion, directed energy deposition, binder jetting, and vat photo polymerization have shown significant promise in fabricating high-performance mold components tailored to specific industrial applications. Despite its growing adoption, additive manufacturing still faces notable challenges, including high material and equipment costs, limited material availability, and complex post-processing requirements. however, ongoing advancements in multi-material printing, simulation-driven design, hybrid manufacturing, and sustainable materials are gradually mitigating these limitations Looking ahead, the integration of additive manufacturing into mainstream mold production is expected to accelerate as research and industry efforts continue to refine the technologies and expand their capabilities.



[CC BY 4.0 Deed Attribution 4.0 International](https://creativecommons.org/licenses/by/4.0/)

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

With further development, am has the potential to not only complement but also redefine how molds are designed, fabricated, and utilized across a wide range of sectors.



[CC BY 4.0 Deed Attribution 4.0 International](https://creativecommons.org/licenses/by/4.0/)

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

References

- [1] T. C. Dzogbewu, "Additive Manufacturing Of Tial-Based Alloys," Vol. 35, 2020, Doi: 2020 <https://doi.org/10.1051/Mfreview/2020032>.
- [2] N. Silin And D. J. Cuscueta, "Sciencedirect Rapid Prototyping Of A Heat Management Device For Hydride Forming Alloys By Additive Manufacturing," *Int. J. Hydrogen Energy*, Vol. 48, No. 88, Pp. 34430–34439, 2023, Doi: 10.1016/J.Ijhydene.2023.05.212.
- [3] G. Fayaz And S. Kazemzadeh, "Towards Additive Manufacturing Of Compressor Impellers : 3d Modeling Of Multilayer Laser Solid Freeform Fabrication Of Nickel Alloy 625 Powder Mixed With Nano-Ceo 2 On Aisi 4140," *Addit. Manuf.*, Vol. 20, No. January, Pp. 182–188, 2018, Doi: 10.1016/J.Addma.2018.02.001.
- [4] M. Salmi, K. Paloheimo, J. Tuomi, J. Wolff, And A. Mäkitie, "Accuracy Of Medical Models Made By Additive Manufacturing (Rapid Manufacturing)," *Yjcms*, Vol. 41, No. 7, Pp. 603–609, 2013, Doi: 10.1016/J.Jcms.2012.11.041.
- [5] A. B. Cameron *Et Al.*, "Assessment Of The Trueness Of Additively Manufactured Mol3 % Zirconia Crowns At Different Printing Orientations With An Industrial And Desktop 3d Printer Compared To Subtractive Manufacturing," *J. Dent.*, Vol. 144, No. March, P. 104942, 2024, Doi: 10.1016/J.Jdent.2024.104942.
- [6] N. Jyeniskhan, K. Shomenov, H. Ali, And E. Shehab, "Exploring The Integration Of Digital Twin And Additive Manufacturing Technologies," *Int. J. Light. Mater. Manuf.*, Vol. 7, No. 6, Pp. 860–881, 2024, Doi: 10.1016/J.Ijlm.2024.06.004.
- [7] D. Cooper, J. Thornby, N. Blundell, R. Henrys, M. A. Williams, And G. Gibbons, "Design And Manufacture Of High Performance Hollow Engine Valves By Additive Layer Manufacturing," *J. Mater.*, Vol. 69, Pp. 44–55, 2015, Doi: 10.1016/J.Matdes.2014.11.017.
- [8] S. Tan And Y. Zhang, "Cirr Annals - Manufacturing Technology A Generative Design Method Based On Spline Scanning For Additive Manufacturing," Vol. 73, Pp. 93–96, 2024, Doi: 10.1016/J.Cirr.2024.04.025.
- [9] K. R. Balasubramanian And V. Senthilkumar, *Additive Manufacturing Applications For Metals And Composites*. Hershey, Pa, Usa,: Advances In Civil And Industrial Engineering; Igi Global, 2020. Doi: Isbn 978-1-79984-054-1.
- [10] L. Zhou *Et Al.*, "Additive Manufacturing : A Comprehensive Review," 2024.
- [11] J. Gardan, "Additive Manufacturing Technologies : State Of The Art And Trends," Vol.



[CC BY 4.0 Deed Attribution 4.0 International](https://creativecommons.org/licenses/by/4.0/)

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

- 7543, No. November, 2015, Doi: 10.1080/00207543.2015.1115909.
- [12] J. Gardan, *Additive Manufacturing Technologies For Polymer Composites : State-Of-The-Art And Future Trends*. Elsevier Inc., 2020. Doi: 10.1016/B978-0-12-819535-2/00001-6.
 - [13] H. Wang, Y. Wan, F. Meng, G. Zhao, X. Liu, And S. Zhang, “Precise Design , Preparation , And Biomechanical Evaluation Of Customized Additively Manufactured Ti6al4v Porous Fusion Cage,” *J. Mater. Res. Technol.*, Vol. 33, No. September, Pp. 8198–8210, 2024, Doi: 10.1016/J.Jmrt.2024.11.121.
 - [14] A. J. Cano, A. Salazar, And J. Rodriguez, “Structural Integrity Of Polymers Processed By Additive Manufacturing Techniques Using Residual Strength Diagrams,” *Theor. Appl. Fract. Mech.*, Vol. 134, No. Pb, P. 104727, 2024, Doi: 10.1016/J.Tafmec.2024.104727.
 - [15] S. Patel, Y. Liu, Z. Siddique, And I. Ghamarian, “Metal Additive Manufacturing: Principles And Applications,” *J. Manuf. Process.*, Vol. 131, No. September, Pp. 1179–1201, 2024, Doi: 10.1016/J.Jmapro.2024.09.101.
 - [16] J. Lee, S. Jang, S. Park, M. Soo Park, And C. J. Bae, “In-Situ Monitoring Of Multi-Physical Dynamics In Ceramic Additive Manufacturing,” *Mater. Des.*, Vol. 246, No. September, P. 113335, 2024, Doi: 10.1016/J.Matdes.2024.113335.
 - [17] N. Phillips, D. Kumar, Y. Liu, And S. Namilae, “Zero-Bias Deep Neural Network For Defect Detection In Composite Additive Manufacturing Using Multisource In-Situ Data,” *Aerosp. Sci. Technol.*, Vol. 155, No. P3, P. 109729, 2024, Doi: 10.2514/6.2024-0264.
 - [18] H. Son And C. Kim, “Automation In Construction 3d Structural Component Recognition And Modeling Method Using Color And 3d Data For Construction Progress Monitoring,” *Autom. Constr.*, Vol. 19, No. 7, Pp. 844–854, 2010, Doi: 10.1016/J.Autcon.2010.03.003.
 - [19] P. M. Bhatt, A. M. Kabir, M. Peralta, H. A. Bruck, And S. K. Gupta, “A Robotic Cell For Performing Sheet Lamination-Based Additive Manufacturing,” *Addit. Manuf.*, Vol. 27, No. February, Pp. 278–289, 2019, Doi: 10.1016/J.Addma.2019.02.002.
 - [20] D. Svetlizky *Et Al.*, “Directed Energy Deposition (Ded) Additive Manufacturing: Physical Characteristics, Defects, Challenges And Applications,” *Mater. Today*, Vol. 49, No. October, Pp. 271–295, 2021, Doi: 10.1016/J.Mattod.2021.03.020.
 - [21] K. L. Sampson *Et Al.*, “Multimaterial Vat Polymerization Additive Manufacturing,” *Acs Appl. Polym. Mater.*, Vol. 3, No. 9, Pp. 4304–4324, 2021, Doi: 10.1021/Acsapm.1c00262.
 - [22] O. Gülcan, K. Günaydın, And A. Tamer, “The State Of The Art Of Material Jetting—A Critical Review,” *Polymers (Basel)*, Vol. 13, No. 16, 2021, Doi: 10.3390/Polym13162829.
 - [23] S. I. Park, D. W. Rosen, S. Kyum Choi, And C. E. Duty, “Effective Mechanical Properties Of Lattice Material Fabricated By Material Extrusion Additive Manufacturing,” *Addit. Manuf.*, Vol. 1, Pp. 12–23, 2014, Doi: 10.1016/J.Addma.2014.07.002.



- [24] S. Sun, M. Brandt, And M. Easton, *Powder Bed Fusion Processes: An Overview*. Elsevier Ltd, 2017. Doi: 10.1016/B978-0-08-100433-3.00002-6.
- [25] M. Li, W. Du, A. Elwany, Z. Pei, And C. Ma, “Metal Binder Jetting Additive Manufacturing: A Literature Review,” *J. Manuf. Sci. Eng. Trans. Asme*, Vol. 142, No. 9, Pp. 1–17, 2020, Doi: 10.1115/1.4047430.
- [26] K. Ronoh, F. Mwema, S. Dabees, And D. Sobola, “Biomedical Engineering Advances Advances In Sustainable Grinding Of Different Types Of The Titanium Biomaterials For Medical Applications : A Review,” *Biomed. Eng. Adv.*, Vol. 4, No. May, P. 100047, 2022, Doi: 10.1016/J.Bea.2022.100047.
- [27] K. Moeinfar, F. Khodabakhshi, And S. F. Kashani-Bozorg, “A Review On Metallurgical Aspects Of Laser Additive Manufacturing (Lam): Stainless Steels , Nickel Superalloys , And Titanium Alloys,” 2021.
- [28] A. Rocha *Et Al.*, “Comprehensive Review Of Advanced Methods For Improving The Parameters Of Machining Steels,” Vol. 125, No. August 2023, Pp. 111–142, 2024, Doi: 10.1016/J.Jmapro.2024.07.044.
- [29] Q. Cao, K. Zhang, H. Pan, X. Yang, C. Zhang, And N. Dang, “International Journal Of Hydrogen Energy An Overview On The Active Aluminum Alloys With Diverse Compositions : Hydrogen-Production-Type And Structural-Type,” *Int. J. Hydrogen Energy*, Vol. 96, No. October, Pp. 113–125, 2024, Doi: 10.1016/J.Ijhydene.2024.11.296.
- [30] J. S. Saini, L. Dowling, D. Trimble, And D. Singh, “Mechanical Properties Of Selective Laser Melted CoCr Alloys : A Review,” *J. Mater. Eng. Perform.*, Vol. 30, No. 12, Pp. 8700–8714, 2021, Doi: 10.1007/S11665-021-06283-1.
- [31] A. Mostafaei *Et Al.*, “Progress In Materials Science Additive Manufacturing Of Nickel-Based Superalloys : A State-Of-The-Art Review On Process-Structure-Defect-Property Relationship,” *Prog. Mater. Sci.*, Vol. 136, No. March, P. 101108, 2023, Doi: 10.1016/J.Pmatsci.2023.101108.
- [32] K. Morshed-Behbahani, A. Aliyu, D. P. Bishop, And A. Nasiri, “Additive Manufacturing Of Copper-Based Alloys For High-Temperature Aerospace Applications : A Review,” *Mater. Today Commun.*, Vol. 38, No. February, P. 108395, 2024, Doi: 10.1016/J.Mtcomm.2024.108395.
- [33] J. Rodriguez, M. Doche, And J. Hihn, “Applied Surface Science Advances Electropolishing Of Gold And Gold Alloys In Hcl-Glycerol-Ethanol Electrolytes,” *Appl. Surf. Sci. Adv.*, Vol. 21, No. April, P. 100604, 2024, Doi: 10.1016/J.Apsadv.2024.100604.
- [34] S. Ahmad *Et Al.*, “Innovations In Additive Manufacturing Of Shape Memory Alloys : Alloys , Microstructures , Treatments , Applications,” Vol. 32, No. August, Pp. 4136–4197, 2024.
- [35] J. Jia *Et Al.*, “International Journal Of Electrochemical Science Stability And Performance Of Lithium Metal Batteries Using Silicon And Silver Alloyed Separator Surfaces,” *Int. J. Electrochem. Sci.*, Vol. 19, No. 9, P. 100742, 2024, Doi: 10.1016/J.Ijoes.2024.100742.



CC BY 4.0 Deed Attribution 4.0 International

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

- [36] H. Im, K. Sim, And T. Seong, “Thermally Stable Agcu Alloy Disc Array For Near Infrared Filters,” *Curr. Appl. Phys.*, Vol. 20, No. 12, Pp. 1321–1327, 2020, Doi: 10.1016/J.Cap.2020.08.017.
- [37] C. Ren, H. He, K. Jin, And D. Wu, “Applied Surface Science Nanophase-Separated Ternary PdAgCu Nanotubes With Rich Interfaces For Enhanced Formic Acid Oxidation Reaction,” Vol. 680, No. September 2024, 2025.
- [38] K. Lekganyane, M. Khodja-Moller, D. Mkhonto, And R. Mostert, “The Development Of Platinum Alloys For Jewellery Applications By Considering Both The Conventional And The Advanced Manufacturing Techniques-Review Paper,” Vol. 01005, 2024.
- [39] M. P. Milz *Et Al.*, “^ Đšğŷđğ Šđğđł Sciencedirect Influence Of Twin Wire Arc Spraying And Machine Hammer Peening Influence Of Twin Wire Arc Spraying And Machine Hammer Peening On The Corrosion Fatigue Of ZnAl4 Coatings On S355 + C On The Corrosion Fatigue Of ZnAl4 Coatings On,” *Procedia Struct. Integr.*, Vol. 42, No. 2019, Pp. 830–837, 2022, Doi: 10.1016/J.Prostr.2022.12.105.
- [40] M. S. Joun *Et Al.*, “Characterization Of Az31b , Az61a And Az80a Magnesium Alloys With An Emphasis On Temperature Compensation For Their Application To A Hot Forging,” Vol. 84, No. October, Pp. 764–785, 2022, Doi: 10.1016/J.Jmapro.2022.10.054.
- [41] B. Yelamasetti *Et Al.*, “Mechanical Characterization And Microstructural Evolution Of Inconel 718 And Ss316l Tig Weldments At High Temperatures,” *J. Mater. Res. Technol.*, Vol. 32, No. July, Pp. 196–207, 2024, Doi: 10.1016/J.Jmrt.2024.07.157.
- [42] S. Zhang *Et Al.*, “Materials Science & Engineering A Comparison Study Of Microstructure And Mechanical Properties Of Standard And Direct-Aging Heat Treated Superalloy Inconel 706,” *Mater. Sci. Eng. A*, Vol. 839, No. 98, P. 142836, 2022, Doi: 10.1016/J.Msea.2022.142836.
- [43] B. Fogagnolo, J. M. Paiva, M. C. R. Guimaraes, S. C. Veldhuis, And A. E. Diniz, “Evaluation Of Milling Parameters On The Surface Integrity Of Welded Inconel 625,” 2022, Doi: 10.1016/J.Jmrt.2022.08.033.
- [44] H. Coldwell, R. Woods, M. Paul, P. Koshy, R. Dewes, And D. Aspinwall, “Rapid Machining Of Hardened Aisi H13 And D2 Moulds , Dies And Press Tools,” Vol. 135, Pp. 301–311, 2003.
- [45] X. Wang, Y. Tao, Y. Zhou, S. Wen, And Y. Shi, “Unraveling The Dual Cracking Mechanism Of 316l / CuSn10 Heterostructures Fabricated By Laser Powder Bed Fusion,” *J. Mater. Res. Technol.*, Vol. 31, No. July, Pp. 4073–4087, 2024, Doi: 10.1016/J.Jmrt.2024.07.148.
- [46] H. L. Hong, Q. Wang, C. Dong, And P. K. Liaw, “Using A Short-Range-Order Cluster Model ;,” Pp. 10–13, 2014, Doi: 10.1038/Srep07065.
- [47] W. S. Cunningham *Et Al.*, “Materials Science & Engineering A Alloying Effects On The Microstructure And Properties Of Laser Additively Manufactured Tungsten Materials,” *Mater. Sci. Eng. A*, Vol. 914, No. August, P. 147110, 2024, Doi: 10.1016/J.Msea.2024.147110.
- [48] Z. Tong *Et Al.*, “In-Vitro Corrosion And Biocompatibility Of Additively Manufactured



- Biodegradable Molybdenum,” *Acta Biomater.*, Vol. 191, No. November 2024, Pp. 66–79, 2024, Doi: 10.1016/J.Actbio.2024.11.019.
- [49] T. Vompe, G. G. Goviazin, O. Dolev, L. Rudnik, And A. Katz-Demyanetz, “Sintering Of Additively Manufactured Zirconium By Moldjet Technology,” *Powder Technol.*, Vol. 436, No. November 2023, P. 119494, 2024, Doi: 10.1016/J.Powtec.2024.119494.
- [50] N. S. Hmeidat *Et Al.*, “Reactive Extrusion Of Frontally Polymerizing Continuous Carbon Fiber Reinforced Polymer Composites,” *Compos. Part A Appl. Sci. Manuf.*, Vol. 190, No. November 2024, P. 108609, 2025, Doi: 10.1016/J.Compositesa.2024.108609.
- [51] A. K. Gupta, R. Kiran, S. Zafar, And H. Pathak, “Effect Of Hygrothermal Ageing On The Mechanical Properties Of Glass Fiber Reinforced Polymer Composite: Experimental And Numerical Approaches,” *Mater. Today Commun.*, Vol. 41, No. November, Pp. 0–3, 2024, Doi: 10.1016/J.Mtcomm.2024.111060.
- [52] S. A. Kareem *Et Al.*, “Aluminium Matrix Composites Reinforced With High Entropy Alloys: A Comprehensive Review On Interfacial Reactions, Mechanical, Corrosion, And Tribological Characteristics,” *J. Mater. Res. Technol.*, Vol. 30, No. May, Pp. 8161–8186, 2024, Doi: 10.1016/J.Jmrt.2024.05.153.
- [53] J. Jun Sha *Et Al.*, “Improved Wettability And Mechanical Properties Of Metal Coated Carbon Fiber-Reinforced Aluminum Matrix Composites By Squeeze Melt Infiltration Technique,” *Trans. Nonferrous Met. Soc. China (English Ed.)*, Vol. 31, No. 2, Pp. 317–330, 2021, Doi: 10.1016/S1003-6326(21)65498-5.
- [54] J. Wei *Et Al.*, “Friction And Wear Characteristics Of Carbon Fiber Reinforced Silicon Carbide Ceramic Matrix (Cf/Sic) Composite And Zirconia (ZrO₂) Ceramic Under Dry Condition,” *Tribol. Int.*, Vol. 119, No. October 2017, Pp. 45–54, 2018, Doi: 10.1016/J.Triboint.2017.10.023.
- [55] S. Qu, Y. Gong, Y. Yang, X. Wen, And G. Yin, “Grinding Characteristics And Removal Mechanisms Of Unidirectional Carbon Fibre Reinforced Silicon Carbide Ceramic Matrix Composites,” *Ceram. Int.*, Vol. 45, No. 3, Pp. 3059–3071, 2019, Doi: 10.1016/J.Ceramint.2018.10.178.
- [56] A. Stark, A. Paddock, T. Nguyen, And K. Woodham, “Stark 1 37 Th Annual Small Satellite Conference Windform® Xt 2.0 Use As 3u Cubesat Primary Structure,” Vol. 7909, Pp. 1–13.
- [57] S. Sharafi, M. H. Santare, J. Gerdes, And S. G. Advani, “Extrusion-Based Additively Manufactured Paek And Paek/Cf Polymer Composites Performance: Role Of Process Parameters On Strength, Toughness And Deflection At Failure,” *J. Compos. Sci.*, Vol. 7, No. 4, 2023, Doi: 10.3390/Jcs7040157.
- [58] H. Nasreddine, A. Djerbi, T. Salem, N. Dujardin, And L. Gautron, “Impact Of Bio-Sourced Material Type And Content On Thermal Insulation And Mechanical Strength Of Geopolymer Composites,” *Constr. Build. Mater.*, Vol. 452, No. November, 2024, Doi: 10.1016/J.Conbuildmat.2024.138932.
- [59] A. Raza, S. Waqar Ahmed, A. Hassan, K. Altaf, H. Wei, And G. Hussain, “Investigation Of The Process-Induced Defects In Metal Fused Deposition Modeling Process For Ultrafuse 316L Stainless Steel,” *Digit. Manuf. Technol.*, Vol. 3, No. 2, Pp. 250–261,



- 2023, Doi: 10.37256/Dmt.3220233447.
- [60] R. Gayatri *Et Al.*, “Polymer-Based Nanocomposite Membranes For Industrial Wastewater Treatment: A Review,” *J. Environ. Chem. Eng.*, Vol. 12, No. 5, P. 113276, 2024, Doi: 10.1016/J.Jece.2024.113276.
- [61] Z. Zhang, J. Wang, L. Hou, D. Zhu, H. J. Xiao, And K. Wang, “Graphene/Carbohydrate Polymer Composites As Emerging Hybrid Materials In Tumor Therapy And Diagnosis,” *Int. J. Biol. Macromol.*, Vol. 287, No. November 2024, P. 138621, 2025, Doi: 10.1016/J.Ijbiomac.2024.138621.
- [62] C. T. Ng And L. Susmel, “Static Assessment Of Notched Additively Manufactured Acrylonitrile Butadiene Styrene (Abs),” *Procedia Struct. Integr.*, Vol. 28, No. 2019, Pp. 627–636, 2020, Doi: 10.1016/J.Prostr.2020.10.073.
- [63] J. Lee, N. A. Patil, And J. H. Park, “Correlating Microstructural And Rheological Variations In Acrylonitrile-Butadiene-Styrene (Abs) With Interlayer Bond Formation In Material Extrusion Additive Manufacturing,” *Addit. Manuf.*, Vol. 96, No. November, P. 104553, 2024, Doi: 10.1016/J.Addma.2024.104553.
- [64] A. Cao, D. Wan, C. Gao, And C. W. Elverum, “A Novel Method Of Fabricating Designable Polylactic Acid (Pla)/Thermoplastic Polyurethane (Tpu) Composite Filaments And Structures By Material Extrusion Additive Manufacturing,” *J. Manuf. Process.*, Vol. 118, No. January, Pp. 432–447, 2024, Doi: 10.1016/J.Jmapro.2024.03.015.
- [65] M. Petousis *Et Al.*, “Valorization Of Recycled Fine Powder Glass (Rfpg) In Additive Manufacturing: Optimization Of The Rfpg Content In Polyethylene Terephthalate Glycol (Petg) And Multi-Response Analysis,” *Clean. Mater.*, Vol. 14, No. September, 2024, Doi: 10.1016/J.Clema.2024.100271.
- [66] A. Haleem And M. Javaid, “Polyether Ether Ketone (Peek) And Its Manufacturing Of Customised 3d Printed Dentistry Parts Using Additive Manufacturing,” *Clin. Epidemiol. Glob. Heal.*, Vol. 7, No. 4, Pp. 654–660, 2019, Doi: 10.1016/J.Cegh.2019.03.001.
- [67] A. Curmi, A. Rochman, And J. Buhagiar, “Influence Of Polyether Ether Ketone (Peek) Viscosity On Interlayer Shear Strength In Screw Extrusion Additive Manufacturing,” *Addit. Manuf.*, Vol. 84, No. December 2023, P. 104086, 2024, Doi: 10.1016/J.Addma.2024.104086.
- [68] M. Daly, M. Chihi, C. Bouraoui, And M. Tarfaoui, “Advancing Composite Materials: Exploring Thermomechanical Properties Of Aerosil/Polycarbonate Composites Via Additive Manufacturing,” *J. Manuf. Process.*, Vol. 131, No. June, Pp. 1770–1783, 2024, Doi: 10.1016/J.Jmapro.2024.10.003.
- [69] N. Garg, V. Rastogi, And P. Kumar, “Process Parameter Optimization On The Dimensional Accuracy Of Additive Manufacture Thermoplastic Polyurethane (Tpu) Using Rsm,” *Mater. Today Proc.*, Vol. 62, Pp. 94–99, 2022, Doi: 10.1016/J.Matpr.2022.02.309.
- [70] N. Kumar, P. K. Jain, P. Tandon, And P. Mohan Pandey, “Experimental Investigations On Suitability Of Polypropylene (Pp) And Ethylene Vinyl Acetate (Eva) In Additive Manufacturing,” *Mater. Today Proc.*, Vol. 5, No. 2, Pp. 4118–4127, 2018, Doi:



CC BY 4.0 Deed Attribution 4.0 International

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

- 10.1016/J.Matpr.2017.11.672.
- [71] M. Fatima Ezzahrae, A. Nacer, E. Latifa, Z. Abdellah, I. Mohamed, And J. Mustapha, “Thermal And Mechanical Properties Of A High-Density Polyethylene (Hdpe) Composite Reinforced With Wood Flour,” *Mater. Today Proc.*, Vol. 72, Pp. 3602–3608, 2023, Doi: 10.1016/J.Matpr.2022.08.394.
 - [72] S. M. Elghnam, Y. H. Abdelalim, And M. A. Hamad, “Influence Of Weathering Exposure On Uv Light Absorption In Low Density Polyethylene Ldpe Grad-La071,” *J. Mater. Res. Technol.*, Vol. 19, Pp. 1493–1496, 2022, Doi: 10.1016/J.Jmrt.2022.05.096.
 - [73] Y. Lv, W. Thomas, R. Chalk, A. Hewitt, And S. Singamneni, “Experimental Evaluation Of Polyphenylsulfone (Ppsf) Powders As Fire-Retardant Materials For Processing By Selective Laser Sintering,” *Polymers (Basel)*, Vol. 13, No. 16, 2021, Doi: 10.3390/Polym13162704.
 - [74] I. I. Feier *Et Al.*, “Design And Evaluation Of Additively Manufactured Polyetherimide Orbital Debris Shielding For Spacecraft,” *Int. J. Impact Eng.*, Vol. 196, No. October 2024, P. 105150, 2025, Doi: 10.1016/J.Ijimpeng.2024.105150.
 - [75] M. Matus-Aguirre, B. Cosson, C. Garnier, F. Schmidt, A. C. Akué-Asséko, And F. Chabert, “Characterization And Modeling Of Laser Transmission Welded Polyetherketoneketone (Pekk) Joints: Influence Of Process Parameters And Annealing On Weld Properties,” *J. Adv. Join. Process.*, Vol. 10, No. June, P. 100252, 2024, Doi: 10.1016/J.Jajp.2024.100252.
 - [76] N. Vidakis *Et Al.*, “Polyvinyl Alcohol As A Reduction Agent In Material Extrusion Additive Manufacturing For The Development Of Pharmaceutical-Grade Polypropylene/Silver Nanocomposites With Antibacterial Properties,” *Mater. Today Commun.*, Vol. 39, No. May, P. 109366, 2024, Doi: 10.1016/J.Mtcomm.2024.109366.
 - [77] B. Guner, Y. E. Bulbul, And N. Dilsiz, “Recycling Of Polyvinyl Butyral From Waste Automotive Windshield And Fabrication Of Their Electrospun Fibrous Materials,” *J. Taiwan Inst. Chem. Eng.*, Vol. 132, P. 104136, 2022, Doi: 10.1016/J.Jtice.2021.11.003.
 - [78] Z. M. Ayalew, X. Guo, And X. Zhang, “Synthesis And Application Of Polyethyleneimine (Pei)-Based Composite/Nanocomposite Material For Heavy Metals Removal From Wastewater: A Critical Review,” *J. Hazard. Mater. Adv.*, Vol. 8, No. June, P. 100158, 2022, Doi: 10.1016/J.Hazadv.2022.100158.
 - [79] F. H. Sangar, M. R. Farahpour, And Z. G. Tabatabaei, “Facile Synthesis Of 2-Hydroxy-B-Cyclodextrin/Polyacrylamide/Carbazole Hydrogel And Its Application For The Treatment Of Infected Wounds In A Murine Model,” *Int. J. Biol. Macromol.*, Vol. 267, No. P1, P. 131252, 2024, Doi: 10.1016/J.Ijbiomac.2024.131252.
 - [80] H. Dutta, D. Veeman, And M. Vellaisamy, “Additively Manufactured Polymethyl Methacrylate Lattice Structures: Effect Of 3d Hybridization On Compressive Strength,” *Mater. Lett.*, Vol. 377, No. October, P. 137487, 2024, Doi: 10.1016/J.Matlet.2024.137487.
 - [81] G. Pelin, M. Sonmez, And C. Pelin, “The Use Of Additive Manufacturing Techniques In The Development Of Polymeric Molds : A Review,” Pp. 1–42, 2024.
 - [82] “Epictool. The Mold And Die Tooling Industry.” Doi: Available Online:



CC BY 4.0 Deed Attribution 4.0 International

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

- <https://Epictool.Ca/The-Mold-And-Die-Tooling-Industry/>.
- [83] M. Kim And J. Hyuk, “Innovative Rapid Cooling Method For Injection Mold Using Liquified Co 2,” *Appl. Therm. Eng.*, Vol. 256, No. April, P. 124151, 2024, Doi: 10.1016/J.Applthermaleng.2024.124151.
 - [84] D. Kvaktun, F. Müller, And R. Schiffers, “Sciencedirect Investigation Of Transfer Learning With Changing Machine , Mold And Material Combinations In Injection Molding,” *Procedia Cirp*, Vol. 126, Pp. 715–720, 2024, Doi: 10.1016/J.Procir.2024.08.295.
 - [85] J. Volke, M. Reit, And H. Heim, “Parameter Recommendation For Injection Molding Based On Similarity Analysis Of Injection Molded Parts,” *J. Manuf. Process.*, Vol. 95, No. April, Pp. 171–182, 2023, Doi: 10.1016/J.Jmapro.2023.03.072.
 - [86] J. E. Kanyo, S. Scha, R. S. Uwanyuze, And K. S. Leary, “Journal Of The European Ceramic Society An Overview Of Ceramic Molds For Investment Casting Of Nickel Superalloys,” Vol. 40, No. March, Pp. 4955–4973, 2020, Doi: 10.1016/J.Jeurceramsoc.2020.07.013.
 - [87] J. Baasch, L. Windisch, F. Koch, S. Linke, E. Stoll, And C. Schilde, “Acta Astronautica Regolith As Substitute Mold Material For Aluminum Casting On The Moon,” *Acta Astronaut.*, Vol. 182, No. January, Pp. 1–12, 2021, Doi: 10.1016/J.Actaastro.2021.01.045.
 - [88] P. Michels, D. Grommes, A. Oeckerath, D. Reith, And O. Bruch, “An Integrative Simulation Concept For Extrusion Blow Molded Plastic Bottles,” *Finite Elem. Anal. Des.*, Vol. 164, No. January, Pp. 69–78, 2019, Doi: 10.1016/J.Finel.2019.06.008.
 - [89] P. Gao *Et Al.*, “Thermo-Mechanical Recycling Via Ultrahigh-Speed Extrusion Of Film-Grade Recycled Ldpe And Injection Molding,” *Sustain. Mater. Technol.*, Vol. 38, No. August, P. E00719, 2023, Doi: 10.1016/J.Susmat.2023.E00719.
 - [90] D. Rio-Santos, C. De Torre-Gamarra, A. J. Fern, B. Levenfeld, And A. Varez, “Optimisation Of Powder Extrusion Moulding Process For Thick Ceramic Electrodes Of Licoo 2 For Enhanced Energy-Density Lithium-Ion Batteries,” Vol. 50, No. April, Pp. 32954–32963, 2024, Doi: 10.1016/J.Ceramint.2024.06.109.
 - [91] Z. Ortega, P. Douglas, P. R. Hanna, J. Kelly-Walley, And M. Mccourt, “Influence Of Mold Pressurization On Cycle Time In Rotational Molding Composites With Welded Ignimbrite As Loading,” *Compos. Commun.*, Vol. 45, No. October 2023, P. 101797, 2024, Doi: 10.1016/J.Coco.2023.101797.
 - [92] I. Model, R. Molding, H. Abdulhussain, R. Michael, R. Thompson, And M. R. Thompson, “Sciencedirect Utilizing Neural Networks Networks For For Image-Based Model A Networks A A Predictive Controller Of A Batch Rotational Molding Process Process,” *Ifac Pap.*, Vol. 58, No. 14, Pp. 470–475, 2024, Doi: 10.1016/J.Ifacol.2024.08.381.
 - [93] Z. Cai *Et Al.*, “Numerical Simulation Of ‘ Sand-Like ’ Polymer Flow During Rotational Moulding Using Smoothed Particle Hydrodynamics Method,” *Appl. Math. Model.*, Vol. 124, No. August, Pp. 694–712, 2023, Doi: 10.1016/J.Apm.2023.08.013.
 - [94] P. Morampudi And S. Gurrapu, “Materials Today: Proceedings Modelling And



[CC BY 4.0 Deed Attribution 4.0 International](https://creativecommons.org/licenses/by/4.0/)

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>

- Analysis Of A Customized Die For Blow Moulding Machine,” *Mater. Today Proc.*, Vol. 62, Pp. 3306–3313, 2022, Doi: 10.1016/J.Matpr.2022.04.239.
- [95] R. Miguel *Et Al.*, “Overcoming Geometric Limitations In Metallic Glasses Through Stretch Blow Molding,” *Appl. Mater. Today*, Vol. 19, P. 100567, 2020, Doi: 10.1016/J.Apm.2020.100567.
- [96] Y. Hak, K. Ram, W. Tae, D. Hyang, And Y. Suk, “Results In Materials Rapid Heating Blow Molding Of Metallic Glasses By Infrared Heating,” *Results Mater.*, Vol. 3, No. November, P. 100045, 2019, Doi: 10.1016/J.Rinma.2019.100045.
- [97] M. Barletta, C. Aversa, M. Puopolo, And S. Vesco, “Extrusion Blow Molding Of Environmentally Friendly Bottles In Biodegradable Polyesters Blends,” *Polym. Test.*, Vol. 77, No. January 2019, P. 105885, 2025, Doi: 10.1016/J.Polymeresting.2019.05.001.
- [98] E. R. Dorp *Et Al.*, “Process-Dependent Structural And Deformation Properties Of Extrusion Blow Molding Parts,” *Polym. Test.*, Vol. 77, No. February, P. 105903, 2019, Doi: 10.1016/J.Polymeresting.2019.105903.
- [99] S. Gupta, V. Uday, A. S. Raghuwanshi, S. Chowkshey, N. Das, And S. Suresh, “Simulation Of Blow Molding Using Ansys Polyflow,” *Apcbee Procedia*, Vol. 5, Pp. 468–473, 2013, Doi: 10.1016/J.Apcbee.2013.05.079.
- [100] H. Zou *Et Al.*, “Microstructure And Mechanical Property Of High-Density 7075 Al Alloy By Compression Molding Of Pom-Based Feedstock,” *J. Mater. Res. Technol.*, Vol. 32, No. August, Pp. 4387–4399, 2024, Doi: 10.1016/J.Jmrt.2024.09.025.
- [101] C. A. Grubb, D. J. Keffer, C. D. Webb, M. Kardos, H. Mainka, And D. P. Harper, “Paper Fiber-Reinforced Polypropylene Composites From Nonwoven Preforms : A Study On Compression Molding Optimization From A Manufacturing Perspective,” *Compos. Part A*, Vol. 185, No. July, P. 108339, 2024, Doi: 10.1016/J.Compositesa.2024.108339.
- [102] H. Sun, X. Fan, M. Zhan, J. Guo, And J. Zhang, “International Journal Of Mechanical Sciences Mechanism Of Uneven Densification In Pbx Compression Molding,” *Int. J. Mech. Sci.*, Vol. 282, No. April, P. 109683, 2024, Doi: 10.1016/J.Ijmecsci.2024.109683.
- [103] S. Feng, A. M. Kamat, And Y. Pei, “International Journal Of Heat And Mass Transfer Design And Fabrication Of Conformal Cooling Channels In Molds : Review And Progress Updates,” *Int. J. Heat Mass Transf.*, Vol. 171, P. 121082, 2021, Doi: 10.1016/J.Ijheatmasstransfer.2021.121082.
- [104] S. Singh, S. Ramakrishna, And R. Singh, “Material Issues In Additive Manufacturing: A Review,” *J. Manuf. Process.*, Vol. 25, Pp. 185–200, 2017.
- [105] J. J. Lewandowski And M. Seifi, “Metal Additive Manufacturing: A Review Of Mechanical Properties,” *Annu. Rev. Mater. Res.*, Vol. 46, No. 1, Pp. 151–186, 2016.
- [106] A. Z. A. Kadir, Y. Yusof, And M. S. Wahab, “Additive Manufacturing Cost Estimation Models—A Classification Review,” *Int. J. Adv. Manuf. Technol.*, Vol. 107, Pp. 4033–4053, 2020.
- [107] M. Baumers, P. Dickens, C. Tuck, And R. Hague, “The Cost Of Additive Manufacturing: Machine Productivity, Economies Of Scale And Technology-Push,” *Technol. Forecast. Soc. Change*, Vol. 102, Pp. 193–201, 2016.



- [108] X. Peng, L. Kong, J. Y. H. Fuh, And H. Wang, "A Review Of Post-Processing Technologies In Additive Manufacturing," *J. Manuf. Mater. Process.*, Vol. 5, No. 2, P. 38, 2021.
- [109] N. N. Kumbhar And A. V Mulay, "Post Processing Methods Used To Improve Surface Finish Of Products Which Are Manufactured By Additive Manufacturing Technologies: A Review," *J. Inst. Eng. Ser. C*, Vol. 99, Pp. 481–487, 2018.
- [110] H. X. Nguyen, H. Suen, B. Poudel, P. Kwon, And H. Chung, "Development Of An Innovative, High Speed, Large-Scaled, And Affordable Metal Additive Manufacturing Process," *Cirp Ann.*, Vol. 69, No. 1, Pp. 177–180, 2020.
- [111] A. M. Rubenchik, W. E. King, And S. S. Wu, "Scaling Laws For The Additive Manufacturing," *J. Mater. Process. Technol.*, Vol. 257, Pp. 234–243, 2018.
- [112] B. J. Vogel, "Intellectual Property And Additive Manufacturing/3d Printing: Strategies And Challenges Of Applying Traditional Ip Laws To A Transformative Technology," *Minn. Jl Sci. Tech.*, Vol. 17, P. 881, 2016.
- [113] A. Brown, M. Yampolskiy, J. Gatlin, And T. Andel, "Legal Aspects Of Protecting Intellectual Property In Additive Manufacturing," In *Critical Infrastructure Protection X: 10th Ifip Wg 11.10 International Conference, Iccip 2016, Arlington, Va, Usa, March 14-16, 2016, Revised Selected Papers 10*, Springer, 2016, Pp. 63–79.
- [114] J. Chang *Et Al.*, "Advanced Material Strategies For Next-Generation Additive Manufacturing," *Materials (Basel)*, Vol. 11, No. 1, P. 166, 2018.
- [115] K. R. Ryan, M. P. Down, And C. E. Banks, "Future Of Additive Manufacturing: Overview Of 4d And 3d Printed Smart And Advanced Materials And Their Applications," *Chem. Eng. J.*, Vol. 403, P. 126162, 2021.
- [116] R. Huang, E. Ulu, L. B. Kara, And K. S. Whitefoot, "Cost Minimization In Metal Additive Manufacturing Using Concurrent Structure And Process Optimization," In *International Design Engineering Technical Conferences And Computers And Information In Engineering Conference*, American Society Of Mechanical Engineers, 2017, P. V02at03a030.
- [117] J. Berk, *Cost Reduction And Optimization For Manufacturing And Industrial Companies*. John Wiley & Sons, 2010.
- [118] R. Parvanda And P. Kala, "Trends, Opportunities, And Challenges In The Integration Of The Additive Manufacturing With Industry 4.0," *Prog. Addit. Manuf.*, Vol. 8, No. 3, Pp. 587–614, 2023.
- [119] S. Pancholi *Et Al.*, "Transforming Additive Manufacturing With Artificial Intelligence: A Review Of Current And Future Trends," *Arch. Comput. Methods Eng.*, Pp. 1–32, 2025.
- [120] G. D. Goh, K. K. Wong, N. Tan, H. L. Seet, And M. L. S. Nai, "Large-Format Additive Manufacturing Of Polymers: A Review Of Fabrication Processes, Materials, And Design," *Virtual Phys. Prototyp.*, Vol. 19, No. 1, P. E2336160, 2024.
- [121] S. Ford And M. Despeisse, "Additive Manufacturing And Sustainability: An Exploratory Study Of The Advantages And Challenges," *J. Clean. Prod.*, Vol. 137, Pp. 1573–1587, 2016, Doi: <https://doi.org/10.1016/j.jclepro.2016.04.150>.



- [122] R. Kawalkar, H. K. Dubey, And S. P. Lokhande, “A Review For Advancements In Standardization For Additive Manufacturing,” *Mater. Today Proc.*, Vol. 50, Pp. 1983–1990, 2022.
- [123] K. Rafi, A. Zhonghong Liu, M. Di Prima, P. Bates, And M. Seifi, “Regulatory And Standards Development In Medical Additive Manufacturing,” *Mrs Bull.*, Vol. 47, No. 1, Pp. 98–105, 2022.



[CC BY 4.0 Deed Attribution 4.0 International](https://creativecommons.org/licenses/by/4.0/)

This article is distributed under the terms of the Creative Commons CC BY 4.0 Deed Attribution 4.0 International attribution which permits copy, redistribute, remix, transform, and build upon the material in any medium or format for any purpose, even commercially without further permission provided the original work is attributed as specified on the Ninety Nine Publication and Open Access pages <https://technology.tresearch.ee>